




- BUS** = 27V
S+ S- = 18V 4 A impulsivi
= 18V 250mA mantenimiento
BUS = 27V
S+ S- = 18V 4 A Stoßstrom
= 18V 250mA Haltestrom
BUS = 27V
S+ S- = 18V 4 A impulsifs
= 18V 250mA entretien
BUS = 27V
S+ S- = 18V 4 A trigger
= 18V 250mA holding current
BUS = 27V
S+ S- = 18V 4 A impulso activador
= 18V 250mA mantenimiento
BUS = 27V
S+ S- = 18V 4 A impuls
= 18V 250mA handhaving

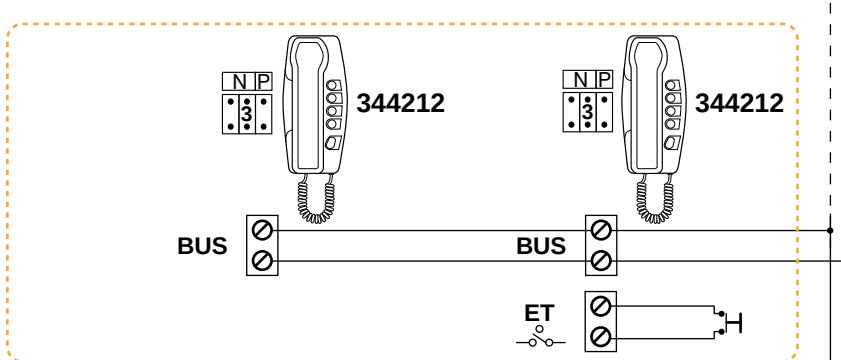